


BVL-50-60-R02

VLD - for DC traction / VLD class 2.2 (BVL)

Voltage limiting device

voltage limiting device, VLD of class 2.2, type VLD-O+F, limiting of occurrence non-permissible touch voltages, equalizing of the earth potential and limiting of overvoltage of a railway system AC and DC, surge protective device SPD of type 1+2

- limits non-permissible high touch voltages on non-live metal parts of a railway equipment in AC and DC railway system
- establishes temporary connection between the return circuit and the earth of the railway electric traction system, during the permissible value of voltage is exceeded
- equalizes the earth potential between the return circuit and the earth surrounding an electric and an electronics equipment and prevents their damage
- limits touch voltage and protects persons that might enter into contact with the parts affected
- eliminates high impulse overvoltages induced into the railway electric traction system or the railway equipment by a lightning strike

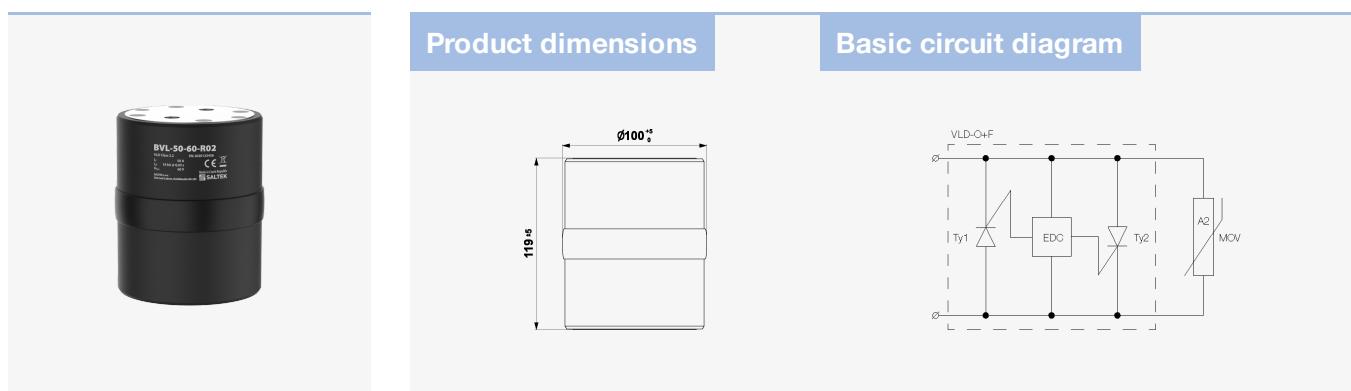

Parameter name	Parameter value	
Class VLD according to EN 50526-2	2.2	
Type VLD according to EN 50122-1	VLD-O+F	
Rated AC (rms) current (@ 60 min)	I_r	50 A
Rated DC current (@ 60min)	I_r	50 A
Leakage current at U_w	I_L	< 70 μ A
Non-triggering voltage	U_w	48.00 V
Maximal short time DC withstand current (@ 30 ms)	I_w	16.0 kA
Maximal short time DC withstand current (@ 100 ms)	I_w	9.0 kA

Short time AC (rms) withstand current (@ 36 ms)	I_w	15.0 kA
High charge impulse (10/350)	I_{imp-hc}	35.00 kA
Lightning current impulse (8/20)	I_{imp-n}	50.00 kA
High current impulse (8/20)	$I_{imp-high}$	75.00 kA
Nominal triggering voltage	U_{Tn}	60.00 V
Maximal residual voltage at I_{imp-n}	U_{RES}	700.00 V
Maximal residual voltage at I_r	U_{RES}	1.20 V
Maximal residual voltage at I_w	U_{RES}	5.00 V
Instantaneous triggering voltage	U_{Ti}	60.00 V
Response time @ lightning current		25 ns
Response time of thyristors	T_R	< 1,5 ms
Degree of protection		IP 67
Range of ambient temperatures (min/max)		-40 / 70 °C
According to standard		EN 50122-1, EN 50526-2
Weight		2.10 kg
ETIM Class		EC003621
Customs tariff number		85301000
EAN		8595090567110
Order number		A06711

SALTEK s.r.o., Dráždanská 561/85, 400 07 Ústí nad Labem, CZ | +420 475 655 511 | info@saltek.cz |

www.saltek.eu

Technická podpora: 800 818 818 | podpora@saltek.cz

20.05.2024 -

12:02:57