

# DM-006/1-R-DJ

## SPD - for data, signalling and telecommunications lines / I&C / ST2+3 (DM) - compact


Surge protection for 2-core signalling lines

coupling impedance (R – resistance)


- coarse and fine surge protection for 2-core signalling lines
- installation close to protected equipment
- for protection of communication interfaces of I&C, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage
- coarse and fine surge protection in differential mode (core – core) and common mode (core – PE)



Product dimensions



Basic circuit diagram

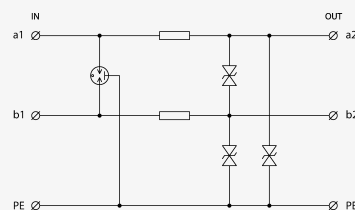

Parameter name		Parameter value
Type of SPD		<b>D1,C1,C2,C3,B2</b>
Location of SPD		<b>ST 2+3</b>
Mounting		<b>DIN rail 35 mm</b>
Nominal voltage	<b><math>U_n</math></b>	<b>6 V DC</b>
Maximum operating voltage	<b><math>U_c</math></b>	<b>6.00 V AC</b>
Maximum operating voltage	<b><math>U_c</math></b>	<b>8.50 V DC</b>
Nominal load current	<b><math>I_L</math></b>	<b>0.500 A</b>
Treshold frequency core-core	<b>f</b>	<b>1.00 MHz</b>
Serial resistance per core	<b>R</b>	<b>1.00 <math>\Omega</math></b>
D1 total discharge current (10/350 $\mu$ s) cores-PE	<b><math>I_{Total}</math></b>	<b>1.00 kA</b>
C1 voltage protection level mode core-core	<b><math>U_p</math></b>	<b>20.00 V</b>

C1 test voltage mode core-core	$U_{OC}$	4.00 kV
C1 voltage protection level mode core-PE	$U_p$	20.00 V
C1 test voltage mode core-PE	$U_{OC}$	4.00 kV
B2 voltage protection level mode core-core	$U_p$	15.00 V
B2 test voltage mode core-core	$U_{OC}$	1.00 kV
B2 voltage protection level mode core-PE	$U_p$	15.00 V
B2 test voltage mode core-PE	$U_{OC}$	1.00 kV
C2 nominal discharge current (8/20 $\mu$ s) per core	$I_n$	10.00 kA
C2 total discharge current (8/20 $\mu$ s) cores-PE	$I_{Total}$	20.00 kA
C3 nominal discharge current (10/1000 $\mu$ s) core-PE	$I_{SM}$	10 A
C3 nominal discharge current (10/1000 $\mu$ s) core-core	$I_{SM}$	10 A
C2 voltage protection level mode core-PE at $I_n$	$U_p$	25 V
C2 test voltage mode core-PE	$U_{OC}$	20.00 kV
C2 voltage protection level mode core-core at $I_n$	$U_p$	25 V
C2 test voltage mode core-core	$U_{OC}$	20.00 kV
C3 voltage protection level mode core-PE at 1 kV/ $\mu$ s	$U_p$	15 V
C3 voltage protection level mode core-core at 1 kV/ $\mu$ s	$U_p$	15 V
Response time core-core	$t_a$	1 ns
Response time core-PE	$t_a$	1 ns
Connection (input - output)		terminals-terminals
Cross-section of connected conductors solid (max)		4.00 mm <sup>2</sup>
Cross-section of connected conductors stranded (max)		4.00 mm <sup>2</sup>
Degree of protection		IP 20
Range of ambient temperatures (min/max)		-40 / 80 °C
Humidity		5 - 95 %
According to standard		EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012
ETIM Class		EC001625
Customs tariff number		85363010
EAN		8595090567264
Order number		A06726

SALTEK s.r.o., Drážďanská 561/85, 400 07 Ústí nad Labem, CZ | +420 475 655 511 | [info@saltek.cz](mailto:info@saltek.cz) |  
[www.saltek.eu](http://www.saltek.eu)  
*Technická podpora: 800 818 818 | [podpora@saltek.cz](mailto:podpora@saltek.cz)*

04.12.2024 -  
10:07:10