

# FLP-NPE-25-VH/0


## SPD - for low voltage / SPD type 1 / Spare modules

Replacement NPE module for FLP-1...-V.H/1.+1


- replacement NPE module for FLP-1...-V.H/1.+1



### Product dimensions

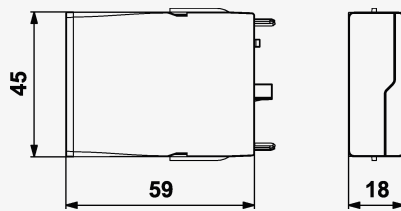

### Basic circuit diagram



Parameter name	Parameter value
Type of SPD	T1,T2
Maximum operating voltage	$U_c$ 255.00 V AC
Lightning impulse current (10/350 $\mu$ s)	$I_{imp}$ 25.00 kA
Nominal discharge current (8/20 $\mu$ s)	$I_n$ 30.00 kA
Maximum discharge current (8/20 $\mu$ s)	$I_{max}$ 60.00 kA
Voltage protection level	$U_p$ 1.50 kV
Ability to independently switch off the following current	$I_{fi}$ 0.1 kA
Response time	$t_a$ 100 ns
ETIM Class	EC000941
Customs tariff number	85363030
EAN	8595090570660
Order number	A07066