

FLP-NPE-25-VH/0


SPD - for low voltage / SPD type 1 / Spare modules

Replacement NPE module for FLP-1...-V.H/1.+1


- replacement NPE module for FLP-1...-V.H/1.+1



Product dimensions

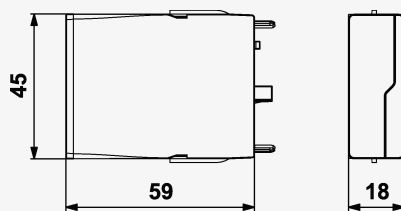

Basic circuit diagram



Parameter name	Parameter value
Type of SPD	T1,T2
Maximum operating voltage	U_c 255.00 V AC
Lightning impulse current (10/350 μ s)	I_{imp} 25.00 kA
Nominal discharge current (8/20 μ s)	I_n 30.00 kA
Maximum discharge current (8/20 μ s)	I_{max} 60.00 kA
Test voltage	U_{oc} 10.0 kV
Voltage protection level	U_p 1.50 kV
Ability to independently switch off the following current	I_{fi} 0.1 kA
Response time	t_a 100 ns
ETIM Class	EC000941
Customs tariff number	85363030
EAN	8595090570660
Order number	A07066