

# FLP-NPE-25-VH/0


## SPD - for low voltage / SPD type 1 / Spare modules

Replacement NPE module for FLP-1...-V.H/1.+1

- replacement NPE module for FLP-1...-V.H/1.+1



### Product dimensions

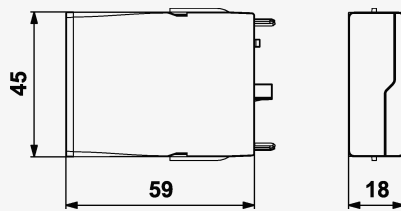

### Basic circuit diagram



Parameter name		Parameter value
Type of SPD		T1,T2
Maximum operating voltage	$U_c$	255.00 V AC
Lightning impulse current (10/350 $\mu$ s)	$I_{imp}$	25.00 kA
Nominal discharge current (8/20 $\mu$ s)	$I_n$	30.00 kA
Maximum discharge current (8/20 $\mu$ s)	$I_{max}$	60.00 kA
Test voltage	$U_{oc}$	10.0 kV
Voltage protection level	$U_p$	1.50 kV
Ability to independently switch off the following current	$I_{fi}$	0.1 kA
Response time	$t_a$	100 ns
ETIM Class		EC000941
Customs tariff number		85363030
EAN		8595090570660
Order number		A07066