

# DL-TLF-UHF


## SPD - for data, signalling and telecommunications lines / ICT / Telecommunications

Two-stage surge protection for analog telephone line and xDSL surge protection for analog telephone line and xDSL


- two-stage surge protection of analog telephone line and xDSL
- installation at boundary LPZ 0 - 1 and higher
- connection of metallic pair via screw terminals
- working voltage up to 170 V DC



Product dimensions

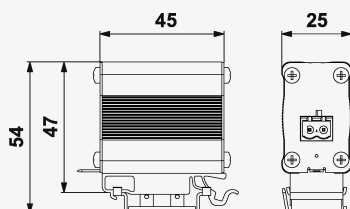

Basic circuit diagram

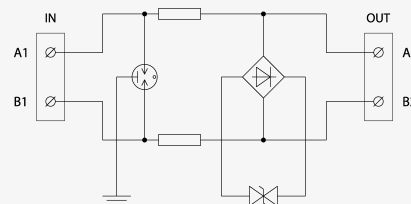

Parameter name	Parameter value
Type of SPD	D1,C2,C3
Location of SPD	ST 1+2+3
Mounting	DIN rail 35 mm
Maximum operating voltage	$U_c$ 170.00 V DC
Serial resistance per core	$R$ 10.00 $\Omega$
Nominal load current	$I_L$ 0.300 A
C2 nominal discharge current (8/20 $\mu$ s) core-core	$I_n$ 5.00 kA
D1 total discharge current (10/350 $\mu$ s) cores-PE	$I_{Total}$ 5.00 kA
C2 voltage protection level mode core-core (@ $U_{oc}/I_n$ )	$U_p$ 600,00 V (10 kV / 5 kA)
C2 voltage protection level mode core-PE (@ $U_{oc}/I_n$ )	$U_p$ 900,00 V (10 kV / 5 kA)
C3 voltage protection level mode core-core (@ $I_n - 1$ kV/ $\mu$ s)	$U_p$ 250,00 V (10 A)
C3 voltage protection level mode core-PE (@ $I_n - 1$ kV/ $\mu$ s)	$U_p$ 550,00 V (10 A)

Response time core-core	$t_a$	1 ns
Response time core-PE	$t_a$	100 ns
Threshold frequency core-core	f	150 MHz (@ -1 dB)
Insertion loss	A	<1 dB (@ 35 MHz)
Connection (input - output)		terminals-terminals
Degree of protection		IP 20
Range of ambient temperatures (min/max)		-40 / 70 °C
Humidity		5 - 95 %
According to standard		EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012
ETIM Class		EC000943
Customs tariff number		85363010
EAN		8595090570844
Order number		A07084

SALTEK s.r.o., Drážďanská 561/85, 400 07 Ústí nad Labem, CZ | +420 475 655 511 | [info@saltek.cz](mailto:info@saltek.cz) | [www.saltek.eu](http://www.saltek.eu)  
 Technická podpora: 800 818 818 | [podpora@saltek.cz](mailto:podpora@saltek.cz)

21.11.2024 -  
17:31:06