

FLP-A50N V/0


SPD - for low voltage / SPD type 1 / Spare modules

Replacement N-PE module for FLP-A50N or FLP-B+C MAXI V/1+1


- replacement N-PE module for FLP-A50N or FLP-B+C MAXI V/1+1



Product dimensions

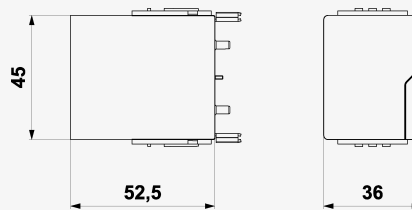

Basic circuit diagram



| Parameter name | | Parameter value |
|---|-----------|-----------------|
| Type of SPD | | T1 |
| Maximum operating voltage | U_c | 255.00 V AC |
| Lightning impulse current (10/350 μ s) | I_{imp} | 50.00 kA |
| Nominal discharge current (8/20 μ s) | I_n | 50.00 kA |
| Maximum discharge current (8/20 μ s) | I_{max} | 100.00 kA |
| Voltage protection level | U_p | 1.50 kV |
| Ability to independently switch off the following current | I_{fi} | 0.1 kA |
| Response time | t_a | 100 ns |
| ETIM Class | | EC000941 |
| Customs tariff number | | 85363090 |
| EAN | | 8595090535379 |
| Order number | | A03537 |