


# FLP-SG50 VS/0


## SPD - for low voltage / SPD type 1 / Spare modules

Replacement module for FLP-SG50 VS


- replacement module for FLP-SG50 VS, remote fault signalling

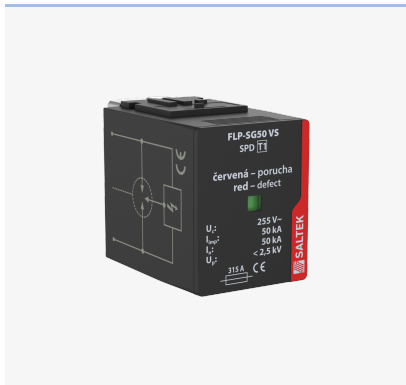

### Product dimensions

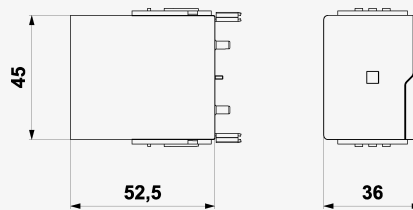

### Basic circuit diagram



Parameter name	Parameter value
Type of SPD	T1
Maximum operating voltage	$U_c$ 255.00 V AC
Short-circuit current rating	$I_{SCCR}$ 50.0 kA
Lightning impulse current (10/350 $\mu$ s)	$I_{imp}$ 50.00 kA
Nominal discharge current (8/20 $\mu$ s)	$I_n$ 50.00 kA
Voltage protection level	$U_p$ 2.50 kV
Ability to independently switch off the following current	$I_{fi}$ 50.0 kA
Response time	$t_a$ 100 ns
Fault indication	red indication field
According to standard	EN 61643-11:2012, IEC 61643-11:2011
ETIM Class	EC000941
Customs tariff number	85363090
EAN	8595090541486
Order number	A04148