


DMLF-024/1-RS

SPD - for data, signalling and telecommunications lines / I&C / Specials - RFI filter


Surge protection for low-frequency 2-core signalling networks

coupling impedance (inductance), screw terminals


- coarse and fine surge protection for low-frequency 2-core signalling networks
- installation close to protected equipment
- for protection of analogue measuring lines in the areas with RF disturbance
- coarse and fine surge protection in differential mode (core – core) and common mode (core – PE)

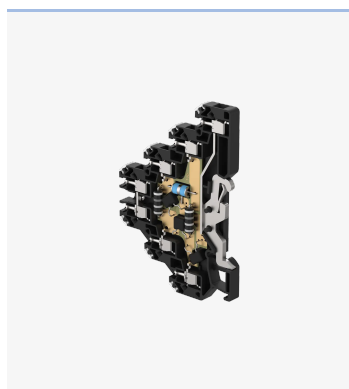

Product dimensions



Basic circuit diagram



| Parameter name | Parameter value |
|--|-----------------------------|
| Type of SPD | C2 |
| Location of SPD | ST 2 |
| Mounting | DIN rail 35 mm |
| Nominal voltage | U_n 24.00 V DC |
| Maximum operating voltage | U_c 31.00 V DC |
| Nominal load current | I_L 0.100 A |
| Threshold frequency core-core | f 0.07 MHz |
| D1 impulse discharge current (10/350 μ s) per core | I_{imp} 0.50 kA |
| D1 total discharge current (10/350 μ s) cores-PE | I_{Total} 1.00 kA |
| C2 nominal discharge current (8/20 μ s) per core | I_n 5.00 kA |
| C2 total discharge current (8/20 μ s) cores-PE | I_{Total} 10.00 kA |
| C2 voltage protection level mode core-PE at I_n | U_p 80.00 V |

| | | |
|---|-------|---|
| C2 voltage protection level mode core-core at In | U_p | 65.00 V |
| C3 voltage protection level mode core-PE at 1 kV/ μ s | U_p | 55.00 V |
| C3 voltage protection level mode core-core at 1 kV/ μ s | U_p | 55.00 V |
| Response time core-core | t_a | 25 ns |
| Response time core-PE | t_a | 25 ns |
| Connection (input - output) | | terminals-terminals |
| Cross-section of connected conductors solid (min) | | 0.14 mm ² |
| Cross-section of connected conductors solid (max) | | 4.00 mm ² |
| Cross-section of connected conductors stranded (min) | | 0.14 mm ² |
| Cross-section of connected conductors stranded (max) | | 2.50 mm ² |
| Degree of protection | | IP 20 |
| Range of ambient temperatures (min/max) | | -40 / 70 °C |
| According to standard | | EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 |
| ETIM Class | | EC001625 |
| Customs tariff number | | 85363010 |
| EAN | | 8595090553335 |
| Order number | | A05333 |