

# DA-275-DJ25-S

## SPD - for low voltage / SPD type 3 / Basic


Surge protection for TN and TT systems

visual and remote fault signalling


- universally applicable serially connected SPD for all types of LV electric and electronic equipments against surge voltage
- installation to LV installations, close to protected equipment
- for protection of the equipments against impact of induced overvoltages during a lightning strike or switching overvoltages



Product dimensions



Basic circuit diagram

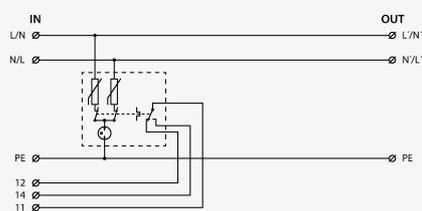

Parameter name	Parameter value
Type of SPD	T3
Mounting	DIN rail 35 mm
Nominal voltage	$U_n$ 230 V AC
Maximum operating voltage	$U_c$ 275.00 V AC
Nominal load current	$I_L$ 25.000 A
Type of network	TN
Maximum overcurrent protection	32 A gL/gG or C 32 A
Short-circuit current rating	$I_{SCCR}$ 6.0 kA
Nominal discharge current (8/20 $\mu$ s) L-N	$I_n$ 3.00 kA
Nominal discharge current (8/20 $\mu$ s) L+N-PE	$I_n$ 5.00 kA
Nominal discharge current (8/20 $\mu$ s) N-PE	$I_n$ 3.00 kA
Test voltage L-N	$U_{oc}$ 6.0 kV
Test voltage L+N-PE	$U_{oc}$ 10.0 kV
Test voltage N-PE	$U_{oc}$ 6.0 kV
Voltage protection level mode L-N	$U_p$ 1.20 kV

Voltage protection level mode L-PE	$U_p$	1.50 kV
Voltage protection level mode N-PE	$U_p$	1.50 kV
Response time L-N	$t_a$	25 ns
Response time N-PE	$t_a$	100 ns
TOV 5 s L-N		335 V
TOV 5 s L-PE		440 V
TOV characteristic (TOV 5 s)		withstand
TOV 120 min L-N		440 V
TOV 120 min L-PE		335 V
TOV characteristic (120 min)		withstand
TOV 200 ms L-PE		1 200 V
TOV 200 ms N-PE		1 455 V
TOV characteristic (TOV 200 ms)		safe failure
Cross-section of connected conductors solid (max)		6.00 mm <sup>2</sup>
Cross-section of connected conductors stranded (max)		6.00 mm <sup>2</sup>
Cross-section of remote indication conductors solid (max)		1.5 mm <sup>2</sup>
Cross-section of remote indication conductors stranded (max)		1.5 mm <sup>2</sup>
Fault indication		red indicator
Remote indication		potential-free change-over contact
Remote indication contacts		250V/0,5A AC,250V/0,1A DC
Degree of protection		IP 20
Range of ambient temperatures (min/max)		-40 / 80 °C
Humidity		5 - 95 %
According to standard		EN 61643-11:2012, IEC 61643-11:2011
ETIM Class		EC000942
Customs tariff number		85363030
EAN		8595090557715
Order number		A05771