

# DL-10G-RJ45-PoE-AB

## SPD - for data, signalling and telecommunications lines / ICT / Ethernet and PoE - compact


Two-stage surge protection for high-speed Ethernet networks with PoE

RJ45 sockets


- combination of coarse and fine protection of Ethernet line with PoE
- installation at the entry of the line into building and close to protected equipment, at the boundary of LPZ 0 and LPZ 1 or higher
- for protection of Ethernet line with PoE against surge voltage
- for all types of PoE / PoE + / PoE ++
- in the scope of delivery: universal plastic adapter for mounting on DIN rail and GND 2 holder



Product dimensions

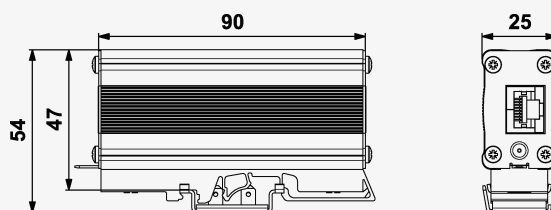

Basic circuit diagram



Parameter name	Parameter value
Type of SPD	D1,C2,C3
Location of SPD	ST 1+2+3
Mounting	DIN rail 35 mm
Maximum operating voltage core-core	$U_c$ 8,50 V DC
Maximum operating voltage pair-pair (POE)	$U_c$ 58,00 V DC
Nominal load current per core at 25 °C	$I_L$ 0.5 A
Treshold frequency core-core	$f$ 500.00 MHz
Insertion attenuation at treshold frequency	3.20 dB
C2 nominal discharge current (8/20 $\mu$ s) core-core	$I_n$ 0.15 kA
C2 nominal discharge current (8/20 $\mu$ s) core-PE	$I_n$ 1.25 kA
C2 nominal discharge current (8/20 $\mu$ s) pair-pair (POE)	$I_n$ 0.15 kA
D1 total discharge current (10/350 $\mu$ s) cores-PE	$I_{Total}$ 2.00 kA

C2 total discharge current (8/20 $\mu$ s) cores-PE	$I_{Total}$	10.00 kA
C2 voltage protection level mode core-core (@Uoc/In)	$U_p$	60,00 V (0,3 kV / 0,15 kA)
C2 voltage protection level mode core-PE (@Uoc/In)	$U_p$	700,00 V (2,5 kV / 1,25 kA)
C2 voltage protection level mode pair-pair (POE) (@Uoc/In)	$U_p$	90,00 V (0,3 kV / 0,15 kA)
C3 voltage protection level mode core-core (@In - 1 kV/ $\mu$ s)	$U_p$	45,00 V (10 A)
C3 voltage protection level mode core-PE (@In - 1 kV/ $\mu$ s)	$U_p$	500,00 V (10 A)
C3 voltage protection level mode pair-pair (POE) (@In - 1 kV/ $\mu$ s)	$U_p$	85,00 V (10 A)
Response time core-core	$t_a$	1 ns
Response time core-PE	$t_a$	100 ns
Connection (input - output)		RJ 45/RJ 45
Degree of protection		IP 30 (without connectors IP 10)
Range of ambient temperatures (min/max)		-10 / 50 °C
Humidity		15 - 85 %
According to standard		EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012
ETIM Class		EC001473
Customs tariff number		85363010
EAN		8595090561491
Order number		A06149