

# BDM-012-V/2-JFR1


## SPD - for data, signalling and telecommunications lines / I&C / ST1+2+3 (BDM, BDG) - plugable

Lightning current arrester with coarse and fine surge protection for two 1-core signalling lines plugable module, coupling impedance (R – resistance), line separated from protective earth via GDT


- lightning current arrester with coarse and fine surge protection for two 1-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones or higher, at the line entry into building and also installation close to protected device
- for protection of communication interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485 interfaces) against impact of surge voltage
- coarse and fine surge protection (core – GND) in differential mode and coarse surge protection in common mode (line – PE)



Product dimensions



Basic circuit diagram

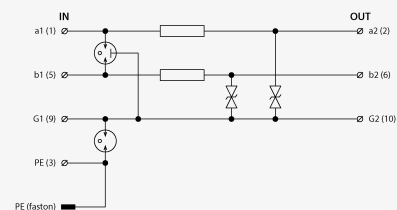

Parameter name	Parameter value	
Type of SPD	D1,C2	
Location of SPD	ST 1+2+3	
Mounting	DIN rail 35 mm	
Nominal voltage	$U_n$	0 V AC
Nominal voltage	$U_n$	12 V DC
Maximum operating voltage	$U_c$	11.00 V AC
Maximum operating voltage	$U_c$	16.00 V DC
Nominal load current	$I_L$	1.000 A
Treshold frequency core-core	f	2.00 MHz
Treshold frequency core-core	f	2.00 MHz

Serial resistance per core	R	0.80 Ω
D1 impulse discharge current (10/350 μs) per core	I <sub>imp</sub>	2.50 kA
D1 total discharge current (10/350 μs) cores-PE	I <sub>Total</sub>	5.00 kA
C2 nominal discharge current (8/20 μs) GND-PE	I <sub>n</sub>	10.00 kA
C2 nominal discharge current (8/20 μs) per core	I <sub>n</sub>	10.00 kA
C2 total discharge current (8/20 μs) cores-PE	I <sub>Total</sub>	20.00 kA
C3 nominal discharge current (10/1000 μs) core-PE	I <sub>SM</sub>	10 A
C3 nominal discharge current (10/1000 μs) core-core	I <sub>SM</sub>	10 A
C3 voltage protection level mode GND-PE at 1 kV/μs	U <sub>p</sub>	550.00 V
C3 voltage protection level mode core-GND at 1 kV/μs	U <sub>p</sub>	22.00 V
Response time core-GND	t <sub>a</sub>	1 ns
Response time GND-PE	t <sub>a</sub>	100 ns
Connection (input - output)		terminals-terminals
Cross-section of connected conductors solid (min)		0.14 mm <sup>2</sup>
Cross-section of connected conductors solid (max)		4.00 mm <sup>2</sup>
Cross-section of connected conductors stranded (min)		0.14 mm <sup>2</sup>
Cross-section of connected conductors stranded (max)		2.50 mm <sup>2</sup>
Degree of protection		IP 20
Range of ambient temperatures (min/max)		-40 / 70 °C
According to standard		EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012
ETIM Class		EC001625
Plug module		DM-012-V/2-J-0 BDM-012-V/2-J-0
Customs tariff number		85363010
EAN		8595090564034
Order number		A06403