

BDM-048-V/1-FR2

SPD - for data, signalling and telecommunications lines / I&C / ST1+2+3 (BDM, BDG) - pluggable


Lightning current arrester with coarse and fine surge protection for 2/3-core signalling lines

pluggable module, coupling impedance (R – resistance), line separated from protective earth via GDT


- lightning current arrester with coarse and fine surge protection for 2/3-core signalling lines
- installation at the boundary of LPZ 0 and LPZ 1 zones or higher, at the line entry into building and also installation close to protected device
- for protection of telecommunication lines (version BDGHF-230) and interfaces of I&C, MaR systems, electronic security and fire detection systems, etc. (mainly for RS-485, PROFIBUS interfaces) against surge voltage
- coarse and fine surge protection (core – core, GND) in differential mode and coarse surge protection in common mode (line – PE)



Product dimensions



Basic circuit diagram

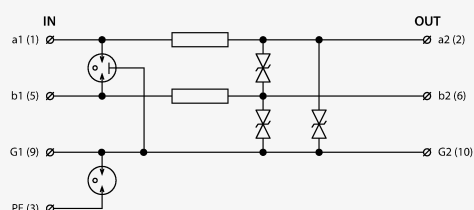

| Parameter name | Parameter value |
|------------------------------|-------------------|
| Type of SPD | D1,C2 |
| Location of SPD | ST 1+2+3 |
| Mounting | DIN rail 35 mm |
| Nominal voltage | U_n 48.00 V DC |
| Maximum operating voltage | U_c 36.00 V AC |
| Maximum operating voltage | U_c 51.00 V DC |
| Nominal load current | I_L 2.000 A |
| Treshold frequency core-core | f 5.00 MHz |
| Serial resistance per core | R 0.40 Ω |

| | | |
|---|-------------|---|
| D1 impulse discharge current (10/350 μ s) per core | I_{imp} | 2.50 kA |
| D1 total discharge current (10/350 μ s) cores-PE | I_{Total} | 5.00 kA |
| C2 nominal discharge current (8/20 μ s) GND-PE | I_n | 10.00 kA |
| C2 nominal discharge current (8/20 μ s) per core | I_n | 10.00 kA |
| C2 total discharge current (8/20 μ s) cores-PE | I_{Total} | 20.00 kA |
| C3 nominal discharge current (10/1000 μ s) core-PE | I_{SM} | 10.00 A |
| C3 nominal discharge current (10/1000 μ s) core-core | I_{SM} | 10.00 A |
| C3 voltage protection level mode GND-PE at 1 kV/ μ s | U_p | 550.00 V |
| C3 voltage protection level mode core-GND at 1 kV/ μ s | U_p | 65.00 V |
| C3 voltage protection level mode core-core at 1 kV/ μ s | U_p | 65.00 V |
| Response time core-core | t_a | 1 ns |
| Response time core-GND | t_a | 1 ns |
| Response time GND-PE | t_a | 100 ns |
| Connection (input - output) | | terminals-terminals |
| Cross-section of connected conductors solid (min) | | 0.14 mm ² |
| Cross-section of connected conductors solid (max) | | 4.00 mm ² |
| Cross-section of connected conductors stranded (min) | | 0.14 mm ² |
| Cross-section of connected conductors stranded (max) | | 2.50 mm ² |
| Degree of protection | | IP 20 |
| Range of ambient temperatures (min/max) | | -40 / 70 °C |
| According to standard | | EN 61643-21+A1,A2:2013, IEC 61643-21+A1,A2:2012 |
| ETIM Class | | EC001625 |
| Plug module | | BDM-048-V/1-0 |
| Customs tariff number | | 85363010 |
| EAN | | 8595090564249 |
| Order number | | A06424 |

